


TOP VIEW


| SPECIFICATIONS | |
|--------------------------------|-----------------------------|
| MANUFACTURER: | CLEANAWATER |
| MODEL: | TS 2000 SS |
| CONSTRUCTION MATERIAL (SHELL): | 1.2MM #304 STAINLESS STEEL |
| CONSTRUCTION MATERIAL (LID): | 1.2MM #304 STAINLESS STEEL |
| NOMINAL FLOW RATE: | 0.56L PER SECOND (2000L/HR) |
| MAXIMUM LOADING: | 0.83L PER SECOND (3000L/HR) |
| WASTE WATER INLET: | DN40 BSPF |
| WASTE WATER OUTLET: | DN50 BSPF |
| WASTE OIL OUTLET: | 38MM OD TUBE |
| SLUDGE OUTLETS: | DN40 BSPF |
| WATER CAPACITY: | 327 LITRES |
| DRY WEIGHT: | 50 KG |
| OPERATING WEIGHT: | 380 KG |
| PUMP: | DIAPHRAGM\HELICAL ROTOR |



FRONT VIEW

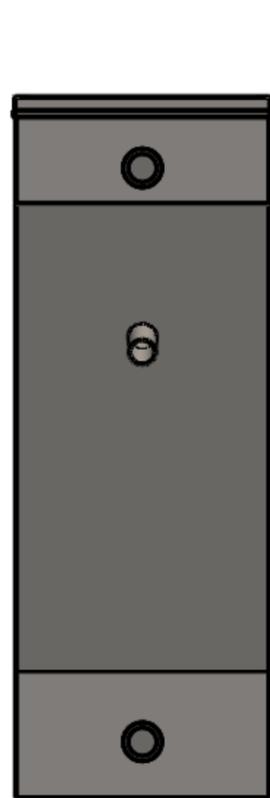

RIGHT ELEVATION

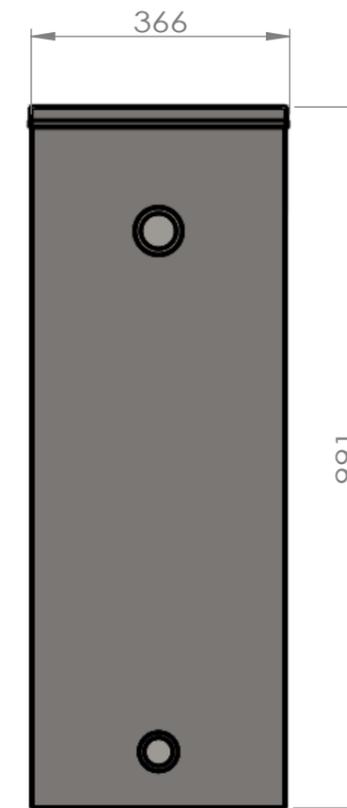

REAR VIEW



| | | | | | | | | | | |
|--|----------------------------|------------|---|-------------------------------------|----------------------|------------------|--------------|----------|-----------------------------|--|
| TITLE: TS 2000 SS OIL WATER SOLIDS SEPARATOR | DWG NO. AA - 005 | | UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR: | MATERIAL: STAINLESS STEEL | NAME | SIGNATURE | DATE | REVISION | DEBUR AND BREAK SHARP EDGES | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CLEANAWATER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CLEANAWATER IS PROHIBITED. |
| | SHEET 1 OF 1 | SCALE: n/a | | A3 | DO NOT SCALE DRAWING | WEIGHT: 50 KG | DRAWN J.S | 5/2013 | | |