


TOP VIEW


SPECIFICATIONS	
MANUFACTURER	CLEANAWATER
MODEL:	TS 2500 PE
CONSTRUCTION MATERIAL (SHELL):	POLYETHYLENE
CONSTRUCTION MATERIAL (LID):	POLYETHYLENE
NOMINAL FLOW RATE:	0.69L PER SECOND (2500L/HR)
MAXIMUM LOADING:	0.83L PER SECOND (3000L/HR)
WASTE WATER INLET:	DN40 BSPF
WASTE WATER OUTLET:	DN50 BSPF
WASTE OIL OUTLET:	DN25 BSPF
SLUDGE OUTLETS:	DN40 BSPF
WATER CAPACITY:	380 LITRES
DRY WEIGHT:	30 KG
OPERATING WEIGHT:	380 KG
PUMP	DIAPHRAGM\HELICAL ROTOR



FRONT VIEW

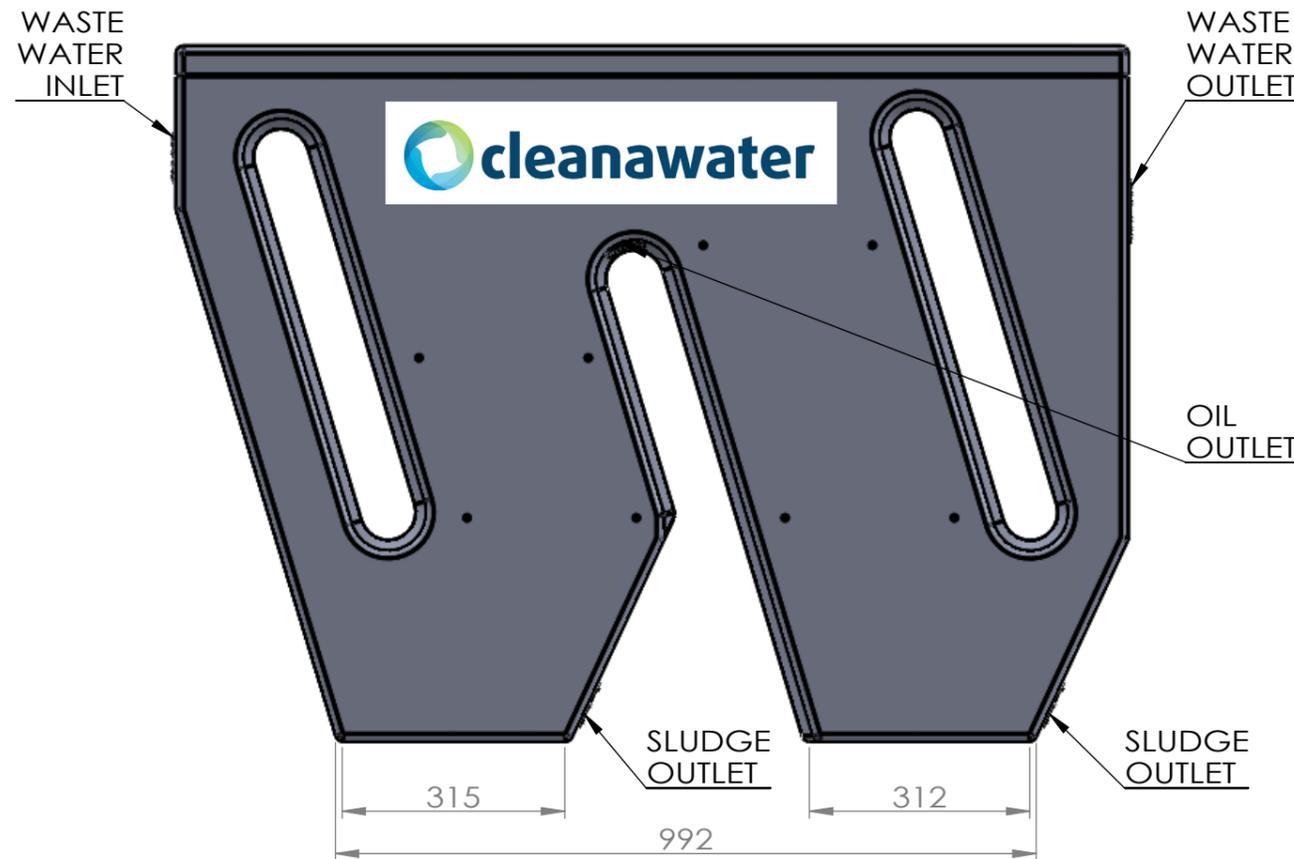

RIGHT ELEVATION

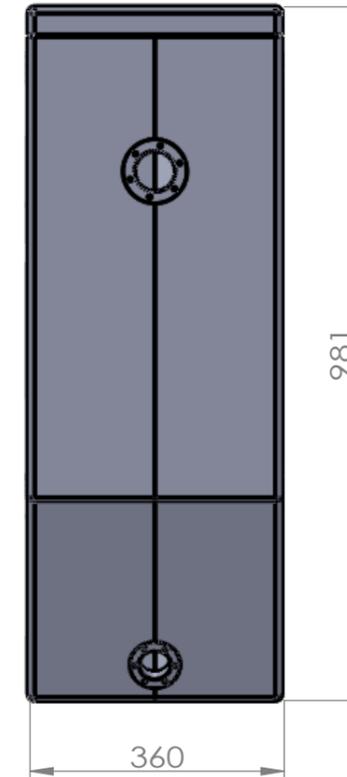

REAR VIEW